

Granit Safe.T & Granit Multisafe

VINYL SAFETY FLOORING FOR WET AND DRY AREAS

Wetroom
approved

Granit Safe. T & Granit Multisafe

Tarkett



Granit Safe. T & Granit Multisafe

Technical data
05-2019

CLASSIFICATION	STANDARDS	GRANIT SAFE.T	GRANIT MULTISAFE
Type of Floorcovering	ISO 10581 EN 13845	- Homogeneous Compact Vinyl	Homogeneous Compact Vinyl -
Classification	ISO 10874 (EN 685) Commercial Industrial ISO 10874 Commercial	Classes 34 43 - -	- - - Class 31
TECHNICAL CHARACTERISTICS	STANDARDS	GRANIT SAFE.T	GRANIT MULTISAFE
Wear Layer Thickness	ISO 24340 (EN 429)	2.00mm	2.00mm
Total Thickness	ISO 24346 (EN 428)	2.00mm	2.5mm
Total Weight	ISO 23997 (EN 430)	2950g/m ²	3010g/m ²
Wear Layer Reinforcement	-	Safe.T Clean	-
Wear Layer Binder Content	ISO 10581	-	Type I
TECHNICAL PERFORMANCES	STANDARDS	GRANIT SAFE.T	GRANIT MULTISAFE
Residual Indentation	Best Measured Value Requirement ISO 24343-1 (EN 433)	0.02mm ≤0.10mm	0.02mm ≤0.10mm
Dimensional Stability	ISO 23999 (EN 434)	≤0.40%	0.40%
Reaction to Fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Bfl-S1 ≥8kW/m ² Pass	Bfl-S1 ≥8kW/m ² Pass
Slip Resistance	DIN 51130 EN 13893	R10 ≥0.3	R10 ≥0.3
Bare foot Test	DIN 51097	Class B (≥18°)	Class B (18°)
Static Electrical Charge	EN 1815	<2kV	<2kV
Light Fastness	EN ISO 105-B02	>7	7
Chemical Resistance	ISO 26987 (EN 423)	Good Resistance	Good Resistance
Fungi & Bacteria Resistance	ISO 846:Part C DIN EN 846-A/C	- Does not favour growth	Does not favour growth -
Thermal Resistance	EN ISO 10456	0.01m ² K/W	0.01m ² K/W
Underfloor Heating		Suitable - Max 27°C	Suitable - Max 27°C
Colours		16	16
Form of Delivery	ISO 24341	Rolls: 25lm x 2m	Rolls: 25lm x 2m


The above information is subject to modifications for the benefit of further improvement. (05/19).

For more detailed technical information, please contact Tarkett. Follow Tarkett's installation and maintenance instructions carefully, these instructions are available on request. The values shown in the technical data are "typical values" and there may be some statistical variation away from the value shown. E&OE

Granit Safe. T



Granit Multisafe

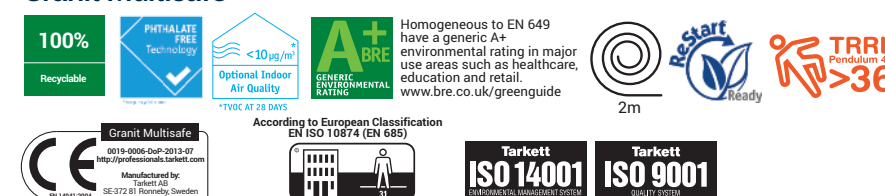

Tarkett's commitments to VOC* emissions

Volatile organic compounds (VOCs) are emitted as gases from manmade materials such as flooring as well as natural ones like trees. To improve indoor air quality, Tarkett has invested significantly in the research of raw materials and flooring manufacturing processes to reach near zero emission levels. Since September 2011 all Tarkett's homogeneous vinyl flooring has emissions below quantifiable level – measuring less than 10 µg/m³ TVOC after 28 days*. All other commercial floorings that Tarkett manufactures currently release less than 10 µg/m³ TVOC after 28 days – ten times lower than European standards. We'll continue to focus on safer, healthier solutions to reduce emission levels across all products, for improved indoor air quality and a healthier quality of life.

* ISO standards 16000-3/-6/-9/-11

Tarkett Limited

4th Floor, Connect 38, 1 Dover Place, Ashford, TN23 1FB
Tel: 0800 328 2115 Email: uksales@tarkett.com

tarkett.co.uk desso.co.uk

Visit our new UK website to see all of our Commercial Flooring collections
[@tarkettUK](https://www.tarkett.co.uk) [@desso_UK](https://www.tarkett.co.uk)




Granit Safe.T & Granit Multisafe

VINYL SAFETY FLOORING FOR WET AND DRY AREAS

Granit Safe.T

- Sustainable slip resistance throughout the product life
- Safety. T Clean reinforced surface for improved stain resistance and ease of maintenance
- Extremely low VOCs contributing to better interior air quality
- 2mm wear layer for extreme durability

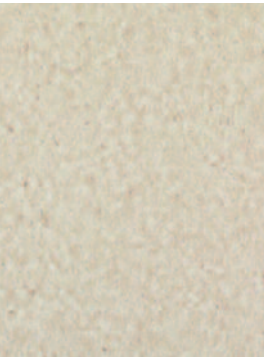

3052 691 Light beige
[weld rod 1290 036] LRV 62.61



3052 702 Beige
[weld rod 1290 143] LRV 41.32



3052 692 Yellow beige
[weld rod 1290 023] LRV 58.93



3052 704 Grey brown
[weld rod 1290 144] LRV 25.32



3052 693 Terracotta
[weld rod 1292 375] LRV 31.53



3052 703 Yellow
[weld rod 1290 070] LRV 59.81



3052 690 Yellow orange
[weld rod 1290 056] LRV 45.00




3052 705 Yellow green
[weld rod 1290 116] LRV 43.08




3052 694 Green
[weld rod 1290 059] LRV 36.90



3052 706 Green blue
[weld rod 1290 107] LRV 44.09

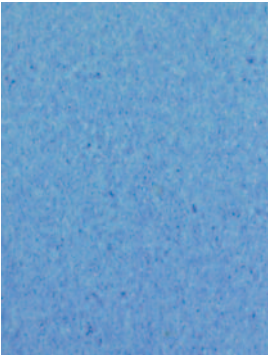


3052 695 Blue
[weld rod 1291 210] LRV 43.27

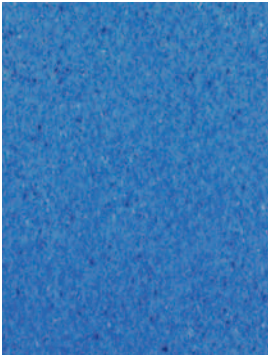


3052 696 Dark blue
[weld rod 1292 379] LRV 20.37




3052 697 Grey
[weld rod 1291 811] LRV 50.18

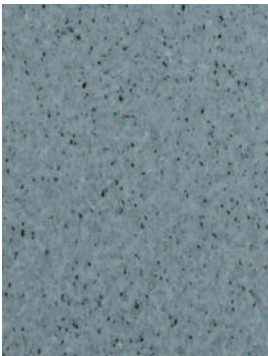

3052 698 Dark grey
[weld rod 1292 383] LRV 28.60

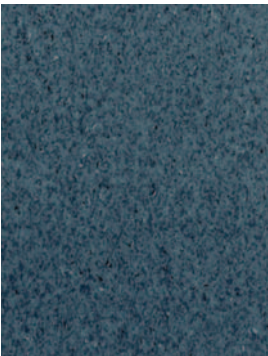

3052 699 Black grey
[weld rod 1290 027] LRV 15.11

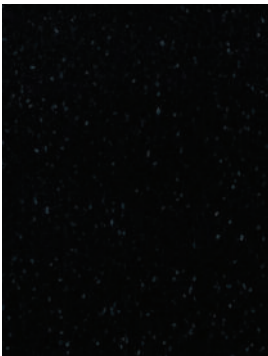

3052 700 Black
[weld rod 1292 384] LRV 6.20

Granit Multisafe

- Waterproof installation, ideal for wet commercial applications
- Studded surface for excellent slip resistance
- Unique concept: walls, floors and accessories available (compatible with Aquarelle Wall HFS)
- Hygienic and easy to maintain




3476 740 Dark grey
[weld rod 1291 542] LRV 21.36



3476 741 Grey
[weld rod 1290 150] LRV 45.26



3476 742 Grey white
[weld rod 1290 151] LRV 65.17

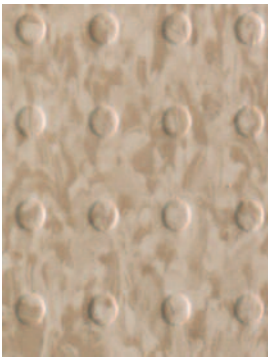

3476 743 Beige
[weld rod 1290 143] LRV 41.32



3476 744 Yellow beige
[weld rod 1290 147] LRV 52.20




3476 745 Grey beige
[weld rod 1290 146] LRV 42.38




3476 746 Grey brown
[weld rod 1290 144] LRV 25.32



3476 747 Orange
[weld rod 1290 148] LRV 35.84

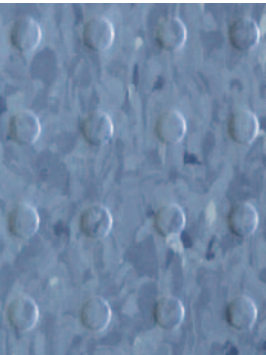

3476 748 Dark blue
[weld rod 1290 112] LRV 26.56

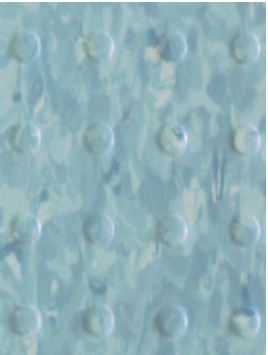


3476 749 Green blue
[weld rod 1290 107] LRV 44.09



3476 750 Soft kiwi
[weld rod 1290 116] LRV 43.08




3476 751 Banana
[weld rod 1290 070] LRV 59.81

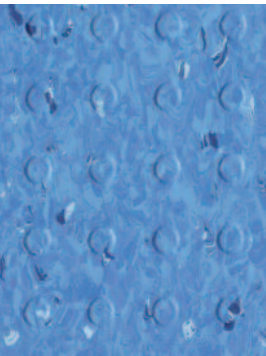


3476 379 Blue
[weld rod 1292 379] LRV 20.37



3476 382 Medium grey
[weld rod 1291 811] LRV 50.18

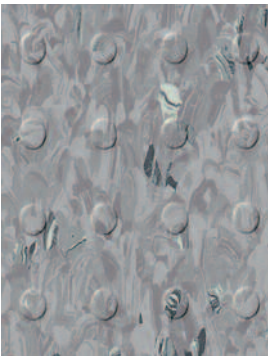

3476 383 Dark grey
[weld rod 1292 383] LRV 28.60

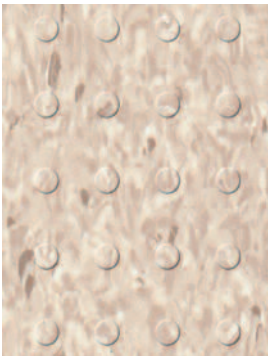

3476 770 Beige white
[weld rod 1288 255] LRV 62.61