

Safetred Wood

VINYL FLOORCOVERING WITH ENHANCED SLIP RESISTANCE

Safety
clearly
InGrained

Safetred Wood

Safetred Wood

Technical data
02-2018

CLASSIFICATION	STANDARDS	SAFETRED WOOD	SAFETRED WOOD LL	SAFETRED WOOD ACOUSTIC
Type of floorcovering	EN 13845	PVC Floorcovering with particle enhanced slip resistance		
Classification	EN 13845 EN ISO 10874 (EN 685)	Esf Commercial 34 Industrial 43	Esf Commercial 34 Industrial 43	Esf Commercial 34 Industrial 43
TECHNICAL CHARACTERISTICS	STANDARDS	SAFETRED WOOD	SAFETRED WOOD LL	SAFETRED WOOD ACOUSTIC
Total thickness	EN ISO 24346 (EN 428)	2.0mm	2.35mm	3.5mm
Total weight	EN ISO 23997 (EN 430)	3340 g/m ²	3410 g/m ²	3750 g/m ²
Form of delivery	EN ISO 24341 (EN 426)	20 lm x 2m (40m ²) Wood 4676 --- (3 digit colour no.)	15 lm x 2m (30m ²) Wood 26752 --- (3 digit colour no.)	20 lm x 2m (40m ²) Wood 26753 --- (3 digit colour no.)
TECHNICAL PERFORMANCES	STANDARDS	SAFETRED WOOD	SAFETRED WOOD LL	SAFETRED WOOD ACOUSTIC
PUR reinforcement		Safety Clean XP	Safety Clean XP	Safety Clean XP
Abrasion group	EN 13845 Annex D EN 660: Part 2	≤ 10% Particle loss T ≤ 0.04 mm	≤ 10% Particle loss T ≤ 0.04 mm	≤ 10% Particle loss T ≤ 0.04 mm
Residual indentation	EN ISO 24343-1 (EN 433)	≤ 0.10 mm	≤ 0.11 mm	≤ 0.15 mm
Castor chair test	ISO 4918 (EN 425)	No damage	No damage	No damage
Furniture leg	EN 424	No damage	No damage	No damage
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%	≤ 0.10%	≤ 0.10%
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 8 mm	≤ 8 mm	≤ 2 mm
Reaction to fire	EN 13501-1	Bfl s1	Cfl s1	Cfl s1
Slip resistance	TRRL Pendulum 4S (Wet) DIN 51130 EN 13893	> 36 R10 ≥ 0.3	> 36 R10 ≥ 0.3	> 36 R10 ≥ 0.3
Electrostatic properties	EN 1815 EN 14041	< 12 kV Antistatic	< 12 kV Antistatic	< 12 kV Antistatic
Impact sound reduction	EN ISO 717/2	Δ Lw = 4 dB	Δ Lw = 11 dB	Δ Lw = 19 dB
Acoustic improvement	NF S 31-074	L _{n,e,w} = 76 dB	L _{n,e,w} = 70 dB	L _{n,e,w} = 61 dB
Light fastness	EN ISO 105-B02	7	7	7
Chemical resistance	EN ISO 26987 (EN 423)	High Resistance	High Resistance	High Resistance
Thermal resistance	EN 12524	0.01 m ² K/W	0.01 m ² K/W	0.01 m ² K/W
Underfloor heating		Suitable - Max 27°C	Suitable - Max 27°C	Suitable - Max 27°C
Colours		Wood 12	Wood 12 (to order - minimum 5 rolls)	Wood 12 (to order - minimum 5 rolls)

The Safetred Wood range are all available in a choice of Compact, Loose Lay and Acoustic.
The above information is subject to modifications for the benefit of further improvement. (02/18)

For more detailed technical information please contact Tarkett. Follow Tarkett's installation and maintenance instruction carefully, available on request. The values shown in the technical data are "typical values" and there may be some statistical variation away from the value shown. E&OE



Safety floors to EN13845 have a generic A+ environmental rating in major use areas such as healthcare and education. www.bre.co.uk/greenguide



Tarkett's commitments to VOC* emissions

Volatile organic compounds (VOCs) are emitted as gases from manmade materials such as flooring as well as natural ones like trees. To improve indoor air quality, Tarkett has invested significantly in the research of raw materials and flooring manufacturing processes to reach near zero emission levels. Since September 2011 all Tarkett's homogeneous vinyl flooring has emissions below quantifiable level – measuring less than 10 µg/m³ TVOC after 28 days*. All other commercial floorings that Tarkett manufactures currently release less than 10 µg/m³ TVOC after 28 days – ten times lower than European standards. We'll continue to focus on safer, healthier solutions to reduce emission levels across all products, for improved indoor air quality and a healthier quality of life.
* ISO standards 16000-3/-6/-9/-11

A wide range of accessories, including Tarkospray, Tarkolay and skirtings are available - see brochure for details.

Tarkett Limited

Lenham Office
Lenham, Maidstone, Kent ME17 2QX, United Kingdom.
Tel 01622 854040 Fax 01622 854520 Email: uksales@tarkett.com

Abingdon Office
Hitching Court, Abingdon Business Park, Abingdon, Oxon OX14 1RB,
United Kingdom. Tel 01235 554848

tarkett.co.uk desso.co.uk

Visit our new UK website to see all of our
Commercial Flooring collections
tarkett.co.uk [@tarkettUK](https://www.facebook.com/tarkettUK)
[@desso.co.uk](https://www.instagram.com/desso.co.uk) [@desso_uk](https://www.linkedin.com/company/desso_uk)

Safetred Wood

VINYL FLOORCOVERING WITH ENHANCED SLIP RESISTANCE

- 'Smart Particle Technology' for a more natural looking finish
- 'Super Matt' surface effect
- **NEW** 'Airforce Applied Technology' for thorough surface protection
- A true commercial safety floor EN13845 with domestic appeal
- Tarkett's industry leading 'responsible PVC', Low VOCs and Phthalate free for best indoor air quality
- Available in Loose Lay & Acoustic options*

** Available to order - minimum 5 rolls*



4676011 Traditional oak grey white **2DAYexpress**
[weld rod 1287178] LRV 38.2



4676012 Traditional oak middle natural **2DAYexpress**
[weld rod 1294428] LRV 26.4



4676013 Traditional oak mid grey **2DAYexpress**
[weld rod 1287766] LRV 16.2



4676014 Traditional oak warm **2DAYexpress**
[weld rod 1287780] LRV 14.3



4676015 Trend oak steel grey **2DAYexpress**
[weld rod 1287537] LRV 21.7




4676016 Trend oak smart walnut **2DAYexpress**
[weld rod 1287766] LRV 15.2



4676007 Trend oak white **2DAYexpress**
[weld rod 1287005] LRV 26.4



4676009 Beech natural **2DAYexpress**
[weld rod 1291451] LRV 30.1

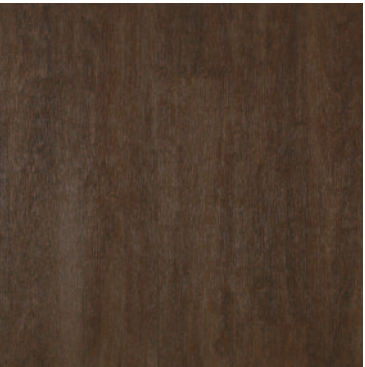

4676004 Traditional oak dark **2DAYexpress**
[weld rod 1287344] LRV 9.4



4676002 Traditional oak natural **2DAYexpress**
[weld rod 1287477] LRV 19.6



4676001 Traditional oak light **2DAYexpress**
[weld rod 1287477] LRV 24.8



4676006 Trend oak natural **2DAYexpress**
[weld rod 1292387] LRV 24.1

2DAYexpress 
CORE COLLECTION FROM TARKETT
AVAILABLE TODAY FROM UK STOCK

Safetred LL*

Loose Lay

- Can be loose laid up to 100m²
- Suitable for laying over uneven subfloors**
- Can be laid over damp subfloor up to 90% RH

Safetred Acoustic*

Acoustic

- Impact sound reduction – 19dB
- Unique indentation properties – 0.15mm

* Available to order – minimum 5 rolls

** Can be fitted over damp subfloors not exceeding 90% RH and over uneven subfloors not exceeding 1.5mm under the 2m ruler.

2DAYexpress AVAILABLE TODAY FROM UK STOCK