

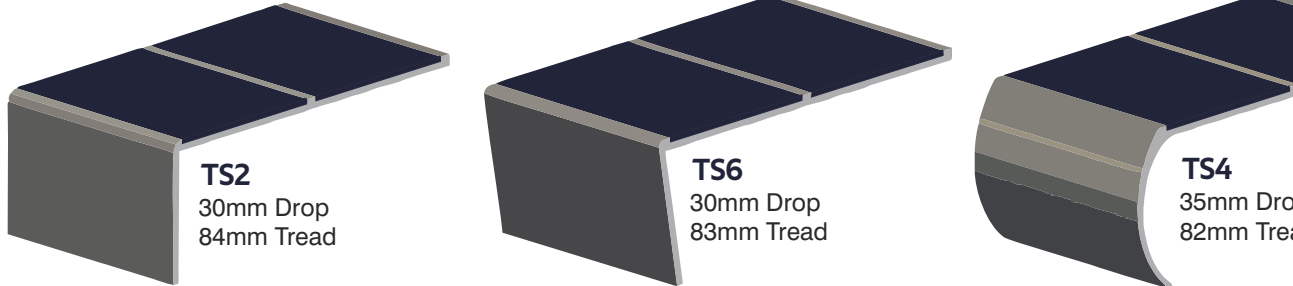
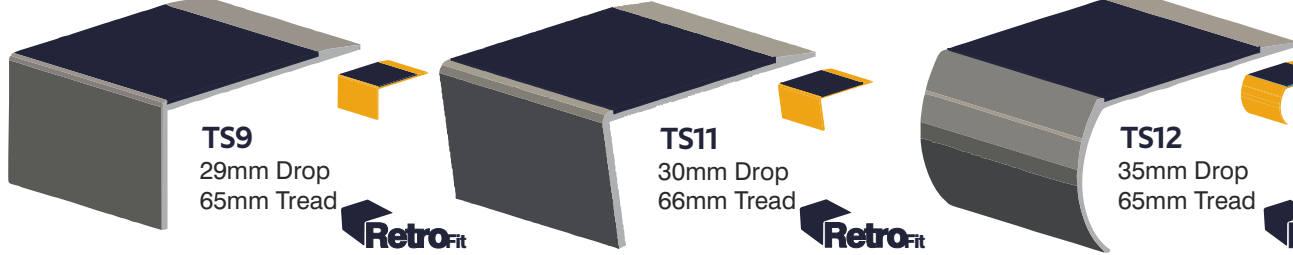
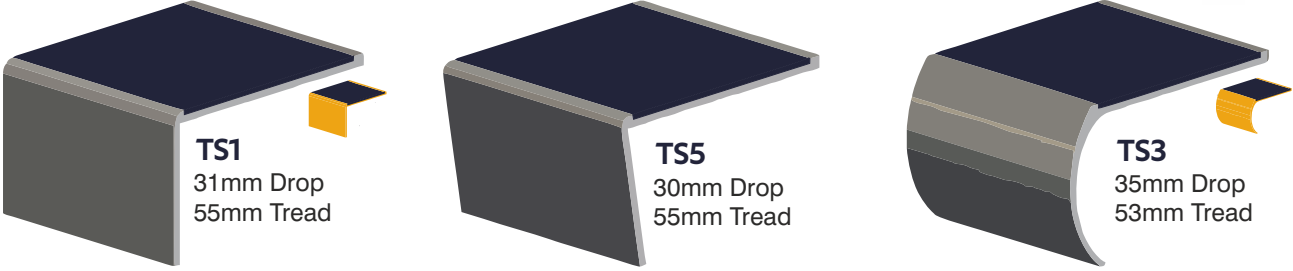
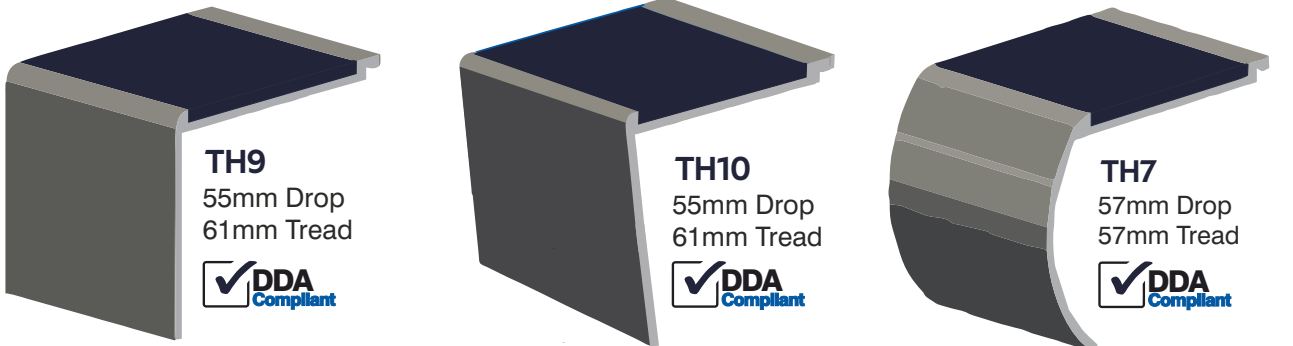


Slimline Range Guage 3.5mm / Standard stock lengths are 2.80m & 3.30m

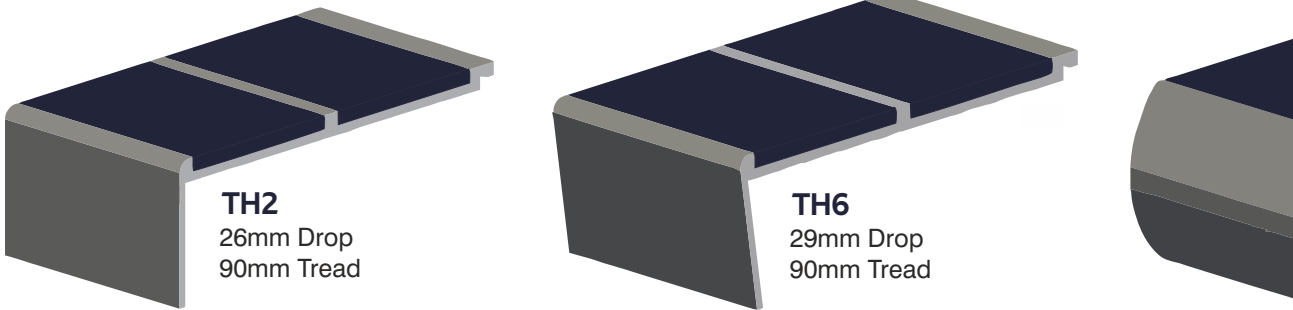

Heavyweight Range Guage 5mm / Standard stock lengths are 2.80m & 3.30m

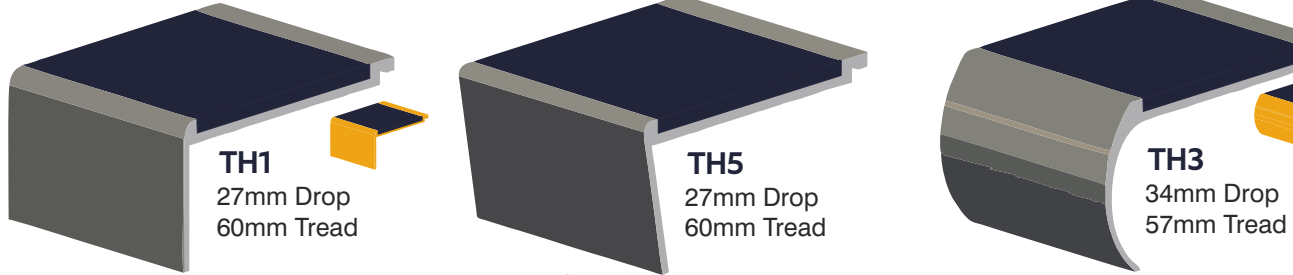

Dimensions shown in millimetres / Images not to scale
Insert Colours Due to printing limitations, please view an actual insert sample prior to placing an order



RetroFit
RetroFit stairnosings profiles have a diminishing tread on the back edge. Therefore they can be installed on top of existing hard/vinyl floor surfaces (Installer to confirm suitability on site)

DDA Compliant
Guidance is provided in approved documents such as approved document M, which is based on BS8300:2001. Nosings are to be made apparent by means of a permanently contrasting material 55mm wide on both the tread and the riser.

Multi-angle
MA1 Multi-angle
Inserts allow for 4 height positions 3.8mm / 5.8mm / 11.8mm / 13.8mm to suit the full range / Standard stock lengths are 3.20m

Multi-Angle Pre-formed
MA183 Pre-formed 83 degree angle for raked back stairs
MA190 Pre-formed 90 degree angle for straight front stairs

Nap trim
TN1 nap trim designed to fit the Tredex Heavyweight range
Standard stock lengths are 3.20m. Available punched or unpunched

Mitre Curves
A mitre curve service is available for curved stairs, produced from a customer template. Clean cut angle pieces for simple site installation
Turnaround time is approx 1 week

Synbrass Gold effect
TS1 / TS3 / TS9 / TS10 / TS11 / TS12 / TH1 / TH3 / TN1 held in stock in Synbrass Gold effect. Others available to order, price/lead time POA

Insert colours
16 colours to choose from. All colours are available in all of the profiles
Sizes 37x2mm / 37x3.5mm / 50x2mm / 50x3.5mm
Black & yellow hazard insert is also available at an additional cost
(Hazard Insert 2-3 day lead time - Made to order)

