



Entrance flooring Tiles

coral[®] click




24 x 24 cm

creating better environments

forbo
FLOORING SYSTEMS

coral[®] click




The first steps in protecting your building.

Coral Click is an exceptionally versatile 'off the shelf' modular matting system that can be assembled on site. Coral Click can be used on its own or in conjunction with our Coral clean-off textile ranges to provide an integrated entrance system.

This versatile PVC tile with Coral textile inserts can be used in all types of buildings and, because it contains no metal components, Coral Click entrance products are particularly suitable for installation in retail environments as they do not interfere with electronic-tagging systems.


- 'Off the shelf' modular matting system
- Exceptionally easy to fit, handle and store
- Available in 12mm & 17mm depths
- Textile inserts from the award winning Coral Brush collection
- 5 year guarantee
- Closed structure to prevent heel trap



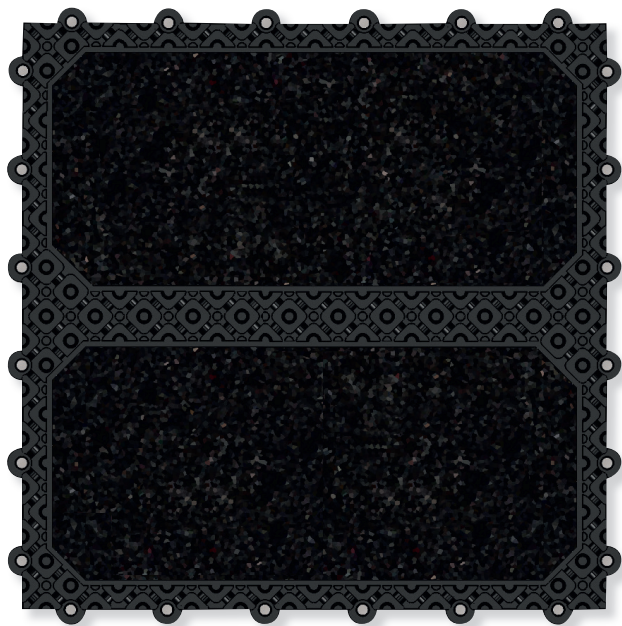


7830 (12mm) | **7880** (17mm)

LRV 2

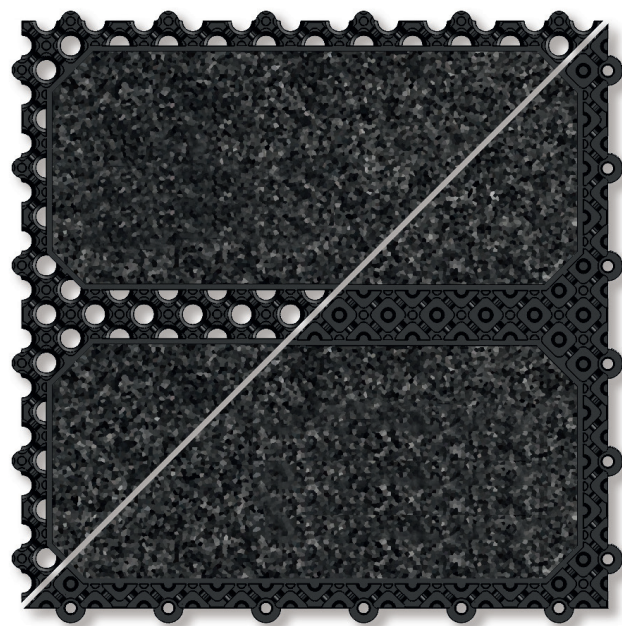

7831 (12mm) | **7881** (17mm)

LRV 3

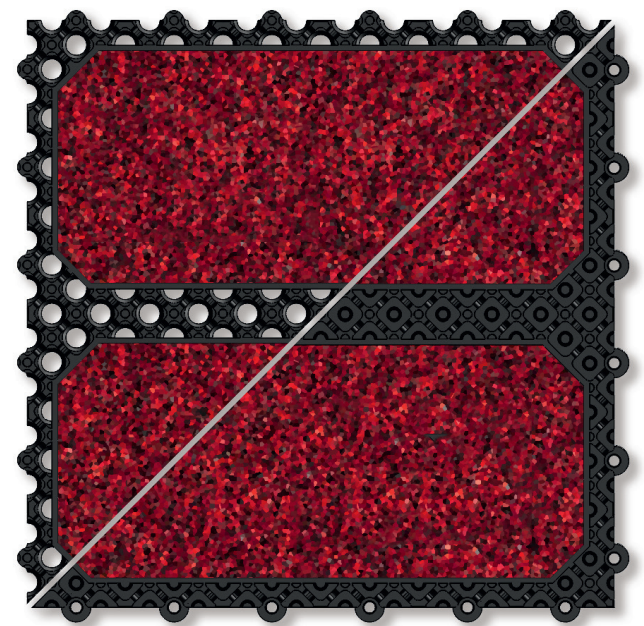


7833 (12mm) | **7883** (17mm)

LRV 3




7834 (12mm) | **7884** (17mm)

LRV 4

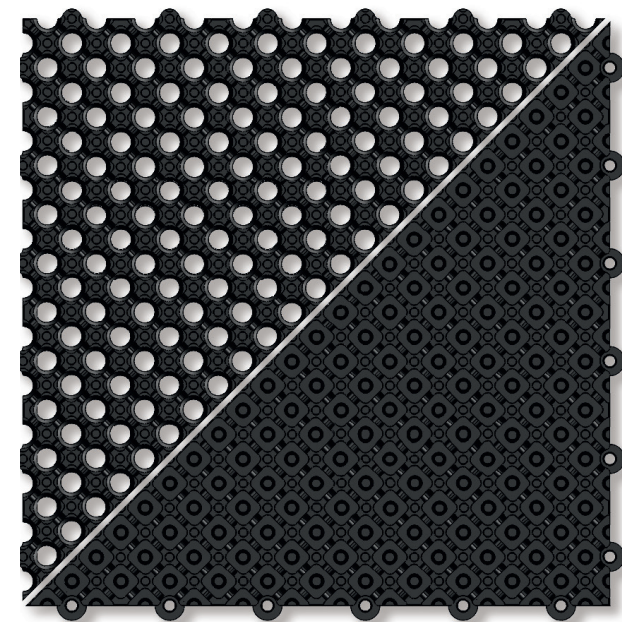

7838 (12mm) Plain | **7888** (17mm) Plain

LRV 4

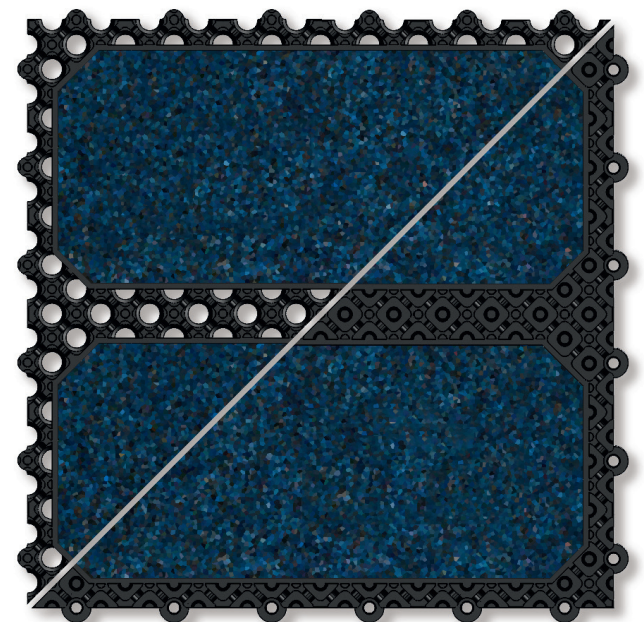





7837 (12mm) | **7887** (17mm)

LRV 2



Technical specifications

		with Coral Brush insert		without Coral Brush insert	
Type		Closed 12mm		Closed 17mm	
Weight tile (kg)		0.46		0.42	
Weight (kg/sqm)		8.1		7.4	
Content of box		24 tiles/1.37 sqm		24 tiles/1.37 sqm	
Weight of box (kg)		11.7		10.7	
Tile manufacturing method		Injection moulding		Injection moulding	
Base material		UV resistant PVC		UV resistant PVC	
Base colour		Anthracite		Anthracite	
	Tile width x length per tile (cm)	24 x 24		24 x 24	
	Tile thickness (mm)	ISO 1765	14	19	11
	Resistance dynamic load (kg) [40,000 passes]	200*		200*	
	Resistance static load (kg/sqcm)	50		50	
	Fire classification	EN ISO 13501-1	B _s s1	C _s s1	
	Slip safety (BS 7976-2)	'Low risk'		'Low risk'	
Temperature resistance		-30° <> +50° Celsius		-30° <> +50° Celsius	
% of surface that is textile		70%		–	
Standard available colours: Coral Brush		5714 - 5721 - 5723 - 5727 - 5730		–	
Textile pile material		100% regenerated ECONYL® Nylon		–	
Textile manufacturing method		Tufted, 5/32" cut-pile		–	
Textile tuft base		Non-woven polyester		–	
	Textile light fastness	EN ISO 105/B02	>5	–	
	Textile rubbing fastness	EN ISO 105/X12	5	–	
	Textile water fastness	EN ISO 105/E01	4 - 5	–	
	Textile sea water fastness	EN ISO 105/E02	4 - 5	–	
	Textile water stains fastness	EN 1307 - G	5	–	
	Textile shampoo fastness	BS 1006	4 - 5	–	
	Textile organic solvents fastness	EN ISO 105/X05	4 - 5	–	
	Installation methods	Coral Click is an adhesive free tile which can be installed in the following directions; monolithic, brick, half drop, tessellated, quarter turn or quarter turn mirrored.			
	Guarantee	Coral Click is guaranteed for 5 years under heavy contract conditions provided it has been professionally fitted by a recognised contractor and regularly maintained in accordance with the Forbo requirements currently in force.			

* straight running fixed wheel test

All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001.
All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001.
Coral is manufactured in a facility certified to SA8000 and OHSAS 18001.

Colourway choice

As with any product, colour and design influence the appearance retention of the floor. The level and type of traffic should be considered as part of the process for selecting colourways. Light colours may not be suitable for heavy traffic areas.

Installation and maintenance

For the latest installation instructions, please visit www.forbo-flooring.co.uk/installation

A well designed entrance flooring system will prevent dirt and moisture from being tracked into the building, prolonging the life of the carpet tiles, reducing cleaning, repair and overall maintenance costs. **Forbo Coral and Nuway entrance systems** are independently proven to remove and retain up to 95% of all dirt and moisture entering a building. Please contact customer services for more information.

Regular vacuuming is essential (using a high suction power driven brush vacuum). Spills and surface stains can be removed by sponging with a damp cloth or, for more resistant stains, with a mild detergent solution. For full installation and cleaning and maintenance instructions please go to www.forbo-flooring.co.uk

Whilst Forbo Flooring UK Limited does its best to ensure that the contents of this samplebook are correct and accurate at the time of publication, to the fullest extent permitted by law, Forbo Flooring UK Limited makes no, and expressly disclaims all, guarantees of any kind, expressed or implied in respect of the information, content, materials or products displayed in this samplebook and does not represent that the information is accurate, complete or current and you are advised to visit our website at www.forbo-flooring.co.uk for up-to-date details or corrections to such contents.

UK

Forbo Flooring UK Limited
High Holborn Road, Ripley
Derbyshire DE5 3NT
London EC1 showroom
79 St John Street, Clerkenwell
London EC1M 4NR
Tel: 0207 553 9300

For commercial enquiries:

If calling from the North,
London & South East
Tel: 0800 0282 162
bcs.flooring.uk@forbo.com

If calling from Scotland,
Midlands & South West
Tel: 0800 0935 258
kcs.flooring.uk@forbo.com

Nuway enquiries:

Tel: 01773 740 688

Residential enquiries:

Tel: 0800 0935 846
Email: info.flooring.uk@forbo.com
www.forbo-flooring.co.uk

Ireland

Forbo Ireland Ltd
2 Deansgrange Business Park
Blackrock
Co Dublin
Tel: 00353 1 2898 898
Fax: 00353 1 2898 177
Email: info.ireland@forbo.com
www.forbo-flooring.ie

Other countries

Forbo Flooring B.V.
P.O. Box 13
1560 AA Krommenie
The Netherlands
Tel: +31 75 647 74 77
Fax: +31 75 647 77 01
Email: contact@forbo.com
www.forbo-flooring.com

Samples:

Tel: 0800 731 2369
email: samples.uk@forbo.com

Registered office:

Forbo Flooring UK Limited
High Holborn Road
Ripley
Derbyshire
DE5 3NT
Registered in England: 9200318



Find us on



FLOORING SYSTEMS